



LED 지중 매립등


Ground Recessed Lighting

Top rate energy saving
Excellent luminous efficiency
Consistent color rendering
Light weight
Effortless installation
Quality waterproof part

LED nR



PRODUCT SPECIFICATION

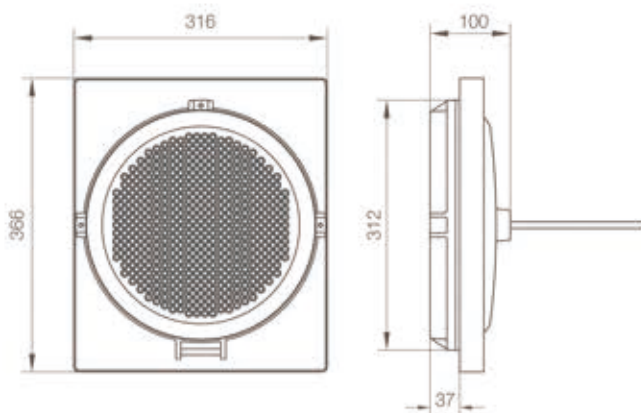

PRODUCT CONTENTS

Model No.	nR-RC-L30	nR-RC-L45	nR-RC-L60
Power	30W	45W	60W
Replaced	MH 175W	MH 250W	MH 400W
Energy saving	85%	85%	85%
Luminous efficiency	150lm/W $\pm$ 10%	150lm/W $\pm$ 10%	157lm/W $\pm$ 10%
Total luminous flux	4,500lm $\pm$ 10%	6,750lm $\pm$ 10%	9,420lm $\pm$ 10%


Type	Built-in, SMPS
Protection	IP-66
Ambient temp.	-20~+40°C
Weight	4Kg
Warranty	3 Years
Rated voltage	AC 100~240V
Frequency	50HZ ~ 60HZ
Power factor	MIN, 90%
CCT	5,000K $\pm$ 10%
CRI	85 $\pm$ 5%
Beam angle	60°, 120°
Descriptions	Materials
Body & Cover	Cast Aluminum Alloy
Front cover	Heat resistant hard glass
SMPS	Constant Current
ACC	SUS

CERTIFICATION



PHOTOMETRIC DATA

Photometric data-60



Photometric data-120

