




Park LED Lighting

- Top rate energy saving
- Excellent luminous efficiency
- Consistent color rendering
- Light weight
- Effortless installation
- Quality waterproof part

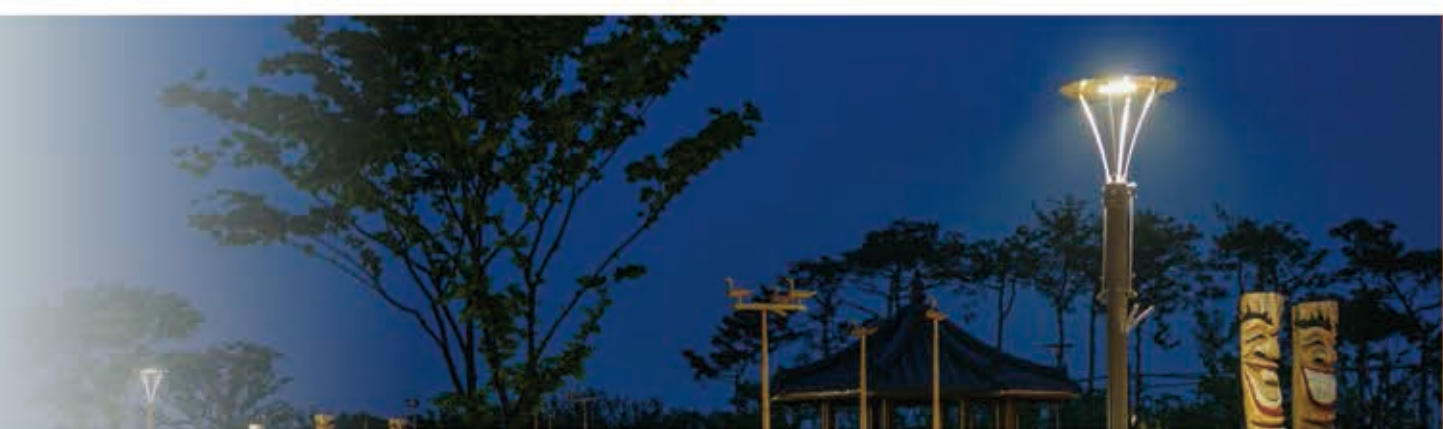

LED Silvia



CDC-LS-L60A



CDC-LS-L60B




SVA-LS-L60

PRODUCT CONTENTS

Model No.	CDC-LS-L60A	CDC-LS-L60B	SVA-LS-L60
Power	60W	60W	60W
Replaced	HPS 250W	HPS 250W	HPS 250W
Energy saving	85%	85%	85%
Luminous Efficiency	155lm/W±10%	155lm/W±10%	155lm/W±10%
Total luminous flux	9,300lm±10%	9,300lm±10%	9,300lm±10%
Weight	18Kg	5Kg	4Kg
Arm size	139.8Ø	139.8Ø	75Ø
Body	Cast Aluminum Alloy	Polycarbonate	Polycarbonate
Type	External, SMPS		
Protection	IP66		
Ambient Temp	-30~+60℃		
Warranty	3 Years		
Rated Voltage	AC 100~240V		
Frequency	50HZ ~ 60HZ		
Power factor	MIN, 90%		
CCT	5,000K±10%		
CRI	85±5%		
Beam angle	120°		
Top cover	Cast Aluminum Alloy		
Front cover	Heat resistant hard glass		
ACC	SUS		

PHOTOMETRIC DATA

Photometric data-120



CERTIFICATION



LED Silvia

PRODUCT SPECIFICATION

